
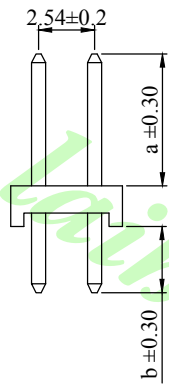


**SPECIFICATION**

Current Rating: 3 A  
 Withstanding Voltage: 500V AC  
 Insulation Resistance: 1000 Megohms Min.  
 Operating Temperature: -55°C to +105°C (NYLON 6T)

**MATERIAL**

Contact: Copper Alloy  
 Insulator: Polyester, UL94V-0  
 NYLON 6T  
 Plating: All Gold or Tin

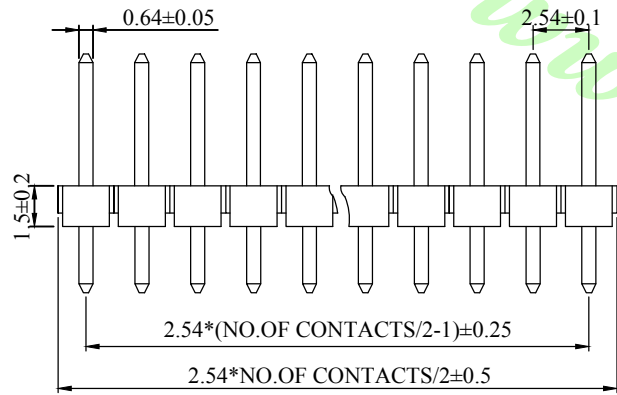

**ORDER INFORMATION**

LP/H 254 S X N a C b - 2xXX  
 Pitch: 2.54mm Type S: 180°  
 Material N: NYLON 6T  
 No. Of Contact Dual Row: 2x02~2x40

**Contact Plating**

- T : Tin
- G : Gold Flash
- G3 : All Gold 3u"
- G5 : All Gold 5u"
- G10: All Gold 10u"
- G15: All Gold 15u"
- G20: All Gold 20u"
- G30: All Gold 30u"

a: Pin Chart Dimension See Pin Chart  
 C: Insulation Height: 1.5mm, Width: 5.08mm  
 b: Pin Chart Dimension See Pin Chart

Standard: 6C3


Pin Chart:

a : \_\_\_\_\_ mm

Standard: 6.0mm

b : \_\_\_\_\_ mm

Standard: 3.0mm

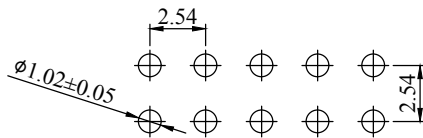

Recommended P.C.Board  
 Hold Layout

公認/UNLESS OTHERWISE SPECIFIED TOLERANCES ARE			單位/Unit mm	品名/Title :	<b>鍊亨電子有限公司</b> LAI HENG TECHNOLOGY LTD. TEL:(02) 8228-6487 FAX:(02) 8228-6486
比例/Scale			Free	2.54mm Pin Header H:1.7 W:5.08 Dual Row Straight Dip Type	
A0	NEW DRAWING	2018.08.16	料號/Part No :	圖號/Drawing No :	核加/APPD. 740
REV	概述/REVISION	日期/DATE	Size A4	<b>LP/H254SXNaBb-2xXX</b>	254-GS-2xXX-AB-N(H1.5)
					審核/CHKD. Joe
					製圖/DR. Mandy
					張數/Sheet 1 of 1
					REV. A0