
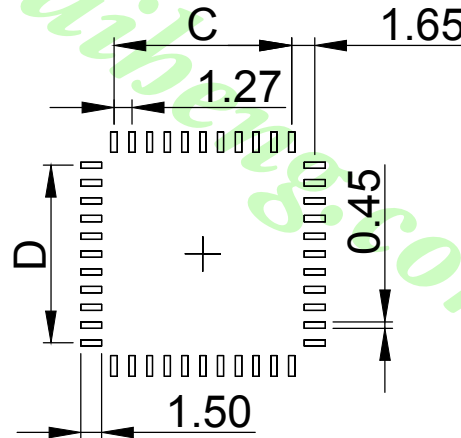


**MATERIAL:**

- \* Contact material: Phosphor bronze JIS 5191.
- \* Contact plating: 100u" Tin over 40u" Nickel.
- \* Insulator: Hi-temp PPS+GF40%, UL 94V-0, 240 .
- \* Insulator Color: Brown.

**SPECIFICATIONS:**

- \* Temperature range -50 to 105 .
- \* Current rating: 1 AMP.
- \* Capacitance: 1.0 Picoforads (Max).
- \* Contact resistance: 30 Milliohms (Max).
- \* Insulation resistance: 1000 Megohmx (Max).
- \* Withstanding voltage: AC 600 Vrms.

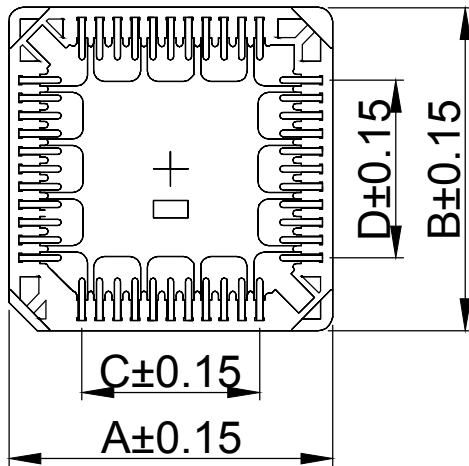

**P.C.B LAYOUT**

NO.OF CONTACTS	A	B	C	D	E
LPLCC020S	15.68	15.68	5.08	5.08	16.80
LPLCC028S	18.22	18.22	7.62	7.62	20.40
LPLCC032S	18.22	20.76	7.62	10.16	21.90
LPLCC044S	23.30	23.30	12.70	12.70	27.50
LPLCC052S	25.84	25.84	15.24	15.24	31.20
LPLCC068S	30.92	30.92	20.32	20.32	38.40
LPLCC084S	36.00	36.00	25.40	25.40	45.60

A0	NEW DRAWING	2018.10.11
REV	概述/REVISION	日期/DATE

公認/UNLESS OTHERWISE SPECIFIED TOLERANCES ARE  
單位/Unit mm  
比例/Scale  
Free Size  
A4

品名/Title :  
料號/Part No :

**1.27mm Center Surface Mount PLCC  
Chip Carrier Socket SMD**

**LPLCC0XXS**

圖號/Drawing No :  
**PLCC-XXP/SPC83004**



**鍊亨電子有限公司**  
LAI HENG TECHNOLOGY LTD.  
TEL:(02) 8228-6487 FAX:(02) 8228-6486

核加/APPD. 7/0 審核/CHKD. Joe 製圖/DR. Mandy 張數/Sheet 1 of 1

REV. A0