

Technical Data:

Material:

Insulator body(housing):PPS (black/UL94V-0).

Pin : Brass, machined.

Plating:Gold plated:2um/80u"nickel/full gold-flashed.

Electrical:

Current rating: 3 Amps / contact max.


Operating: 60 Veff.

Insulation resistance: > 1000 MΩ at V=100V.

Mechanical:

Operating temperature: Gold plated: -55°C to +125°C .


Soldering temperature: +260°C, 10s max.

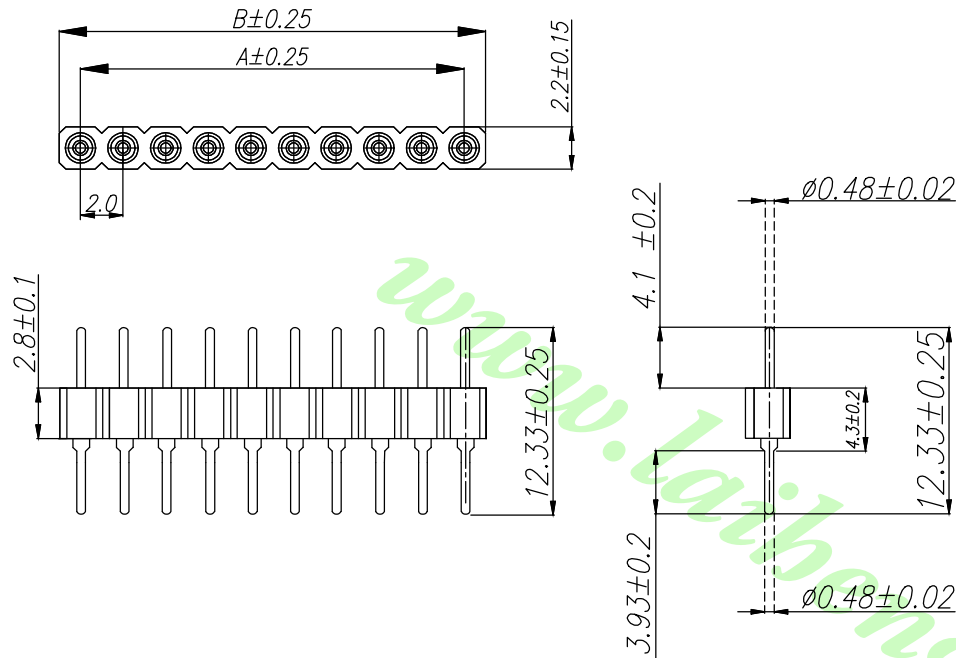

No of contacts	Dim/mm A	Dim/mm B	No of contacts	Dim/mm A	Dim/mm B
1		2.0	21	40.0	42.0
2	2.0	4.0	22	42.0	44.0
3	4.0	6.0	23	44.0	46.0
4	6.0	8.0	24	46.0	48.0
5	8.0	10.0	25	48.0	50.0
6	10.0	12.0	26	50.0	52.0
7	12.0	14.0	27	52.0	54.0
8	14.0	16.0	28	54.0	56.0
9	16.0	18.0	29	56.0	58.0
10	18.0	20.0	30	58.0	60.0
11	20.0	22.0	31	60.0	62.0
12	22.0	24.0	32	62.0	64.0
13	24.0	26.0	33	64.0	66.0
14	26.0	28.0	34	66.0	68.0
15	28.0	30.0	35	68.0	70.0
16	30.0	32.0	36	70.0	72.0
17	32.0	34.0	37	72.0	74.0
18	34.0	36.0	38	74.0	76.0
19	36.0	38.0	39	76.0	78.0
20	38.0	40.0	40	78.0	80.0

Part No.
LSIP 200 M - 1 x XX GO

- Plating:Gold Flashed
- No. of Contacts: Single Row:1x01~1x40
- M:Machined Pin Header
- 2.00mm Pitch
- Series No.

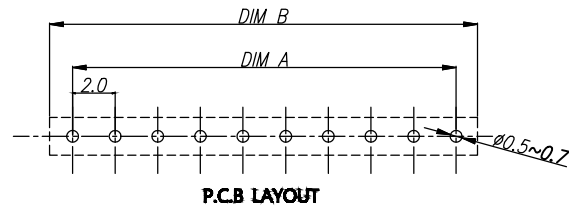

REV	描述/REVISION	日期/DATE
A0	NEW DRAWING	2018.08.16

公差/UNLESS OTHERWISE SPECIFIED TOLERANCES ARE

單位/Unit	品名/Title :
mm	2.00MM Michined Pin Header Single Row (Gold Plated)
比例/Scale	料號/Part No :
Free	LSIP200M-1x XXGO
Size	圖號/Drawing No :
A4	ILMSXX-G3a-2.0(S102-G3a)

鍊亨電子有限公司
LAI HENG TECHNOLOGY LTD.
 TEL:(02) 8228-6487 FAX:(02) 8228-6486

核加/APPD. 7/0 審核/CHKD. Joe 製圖/DR. Mandy 張數/Sheet 1 of 1 REV. A0