

Features:

- Material: Phosphor bronze
- Used in LH-MF300F-__ series housing
- Wire range: #20 ~ #30 AWG
- Thickness: 0.2mm


Specifications:

- Current rating:

Wire size	# 20	# 22	# 24	# 26	# 28	# 30
Ampere	5 A	5 A	4 A	3 A	2 A	1 A


- Voltage rating: 250V AC(RMS) or DC
- Contact resistance: 10mΩ max.
- Dielectric strength: 1500V AC/minute
- Temperature rise: 30°C max.

(carry rated current load)

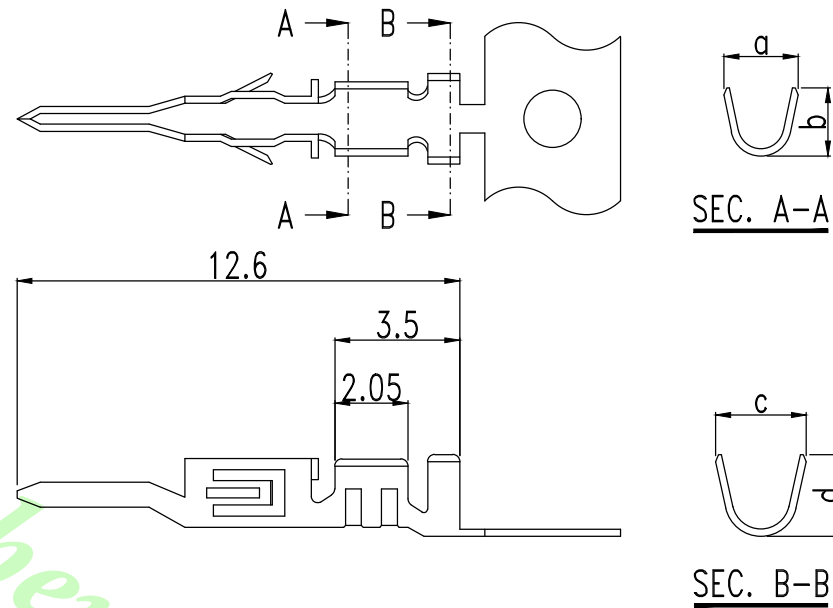

Ordering Information

Part No.	Finished	Wire size	Dim. a	Dim. b	Dim. c	Dim. d
LT-MF3001M-PS	Tin-plated	#26 ~ #30 AWG	1.8	1.6	2.4	1.9
LT-MF3001MGT-PS	Gold flash in contact area. Others: Tin-plated					
LT-MF3001MGO-PS	Gold flash					
LT-MF3002M-PS	Tin-plated	#20 ~ #24 AWG	2.1	2.1	2.7	2.4
LT-MF3002MGT-PS	Gold flash in contact area. Others: Tin-plated					
LT-MF3002MGO-PS	Gold flash					

		公差/UNLESS OTHERWISE SPECIFIED TOLERANCES ARE		單位/Unit mm	品名(Title): .118"(3.0mm) Crimp Terminal (Male)		 鍊亨電子有限公司 LAI HENG TECHNOLOGY LTD. TEL: (02) 8228-6487 FAX: (02) 8228-6486				
		X.XXX ±0.05 X.XX ±0.15 X.X ±0.25		比例/Scale Free Size A4	料號/Part No: LT-MF300_M__PS				圖號/Drawing No: 30001TM-N		
A0	NEW DRAWING	2018.08.20					核對/APPD. Zho	審核/CHKD. Joe	製圖/DR. Mandy	張數/Sheet 1 of 1	REV. A0
REV	概述/REVISION	日期/DATE									