

Features:

- Material: Phosphor bronze
- Used in LH-MF300M-__ series housing
- Wire range: #20 ~ #30 AWG
- Thickness: 0.2mm


Specifications:

- Current rating:

Wire size	# 20	# 22	# 24	# 26	# 28	# 30
Ampere	5 A	5 A	4 A	3 A	2 A	1 A

- Voltage rating: 250V AC(RMS) or DC
- Contact resistance: 10mΩ max.
- Dielectric strength: 1500V AC/minute
- Temperature rise: 30°C max.

(carry rated current load)

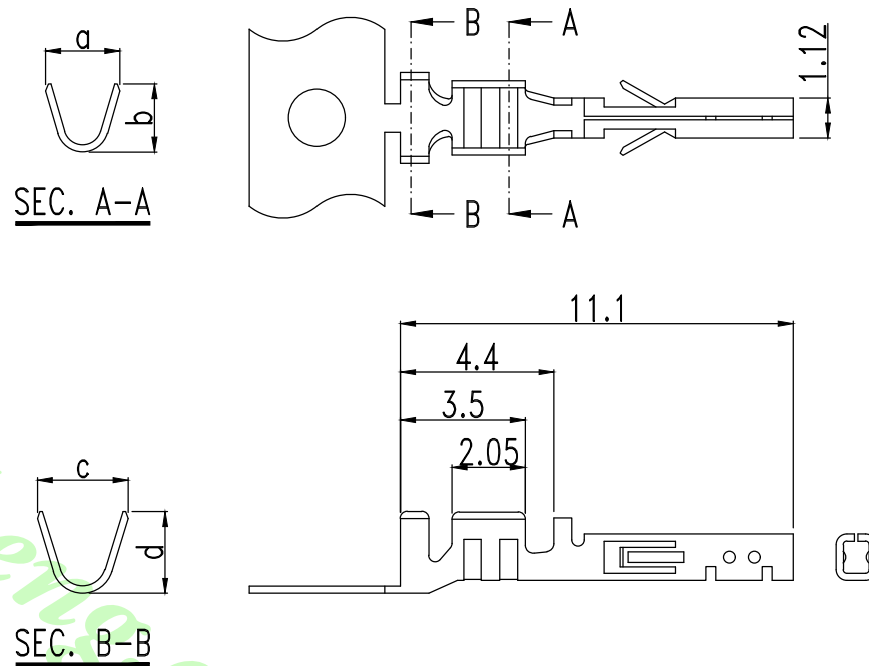

Ordering Information

Part No.	Finished	Wire size	Dim. a	Dim. b	Dim. c	Dim. d
LT-MF3001F-PS	Tin-plated	#26 ~ #30 AWG	1.8	1.6	2.4	1.9
LT-MF3001FGT-PS	Gold flash in contact area. Others: Tin-plated					
LT-MF3001FGO-PS	Gold flash					
LT-MF3002F-PS	Tin-plated	#20 ~ #24 AWG	2.1	2.1	2.7	2.4
LT-MF3002FGT-PS	Gold flash in contact area. Others: Tin-plated					
LT-MF3002FGO-PS	Gold flash					

		公差/UNLESS OTHERWISE SPECIFIED TOLERANCES ARE		單位/Unit mm	品名(Title): .118"(3.0mm) Crimp Terminal (Female)		銻亨電子有限公司 LAI HENG TECHNOLOGY LTD. TEL: (02) 8228-6487 FAX: (02) 8228-6486					
		X.XXX ±0.05 X.XX ±0.15 X.X ±0.25		比例/Scale Free	料號/Part No: LT-MF300_F__-PS				圖號/Drawing No: 30001TF-N			
A0	NEW DRAWING	2018.08.20						核對/APPD. Joe	審核/CHKD. Joe	製圖/DR. Mandy	張數/Sheet 1 of 1	REV. A0
REV	概述/REVISION	日期/DATE		單位/Unit A4								