
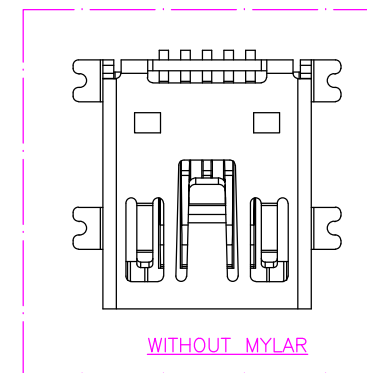

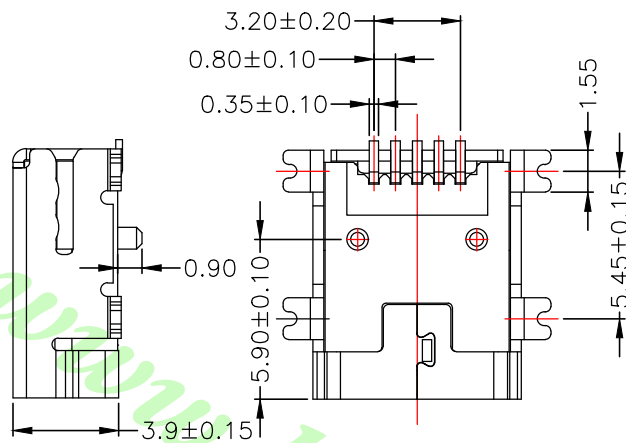


RoHS


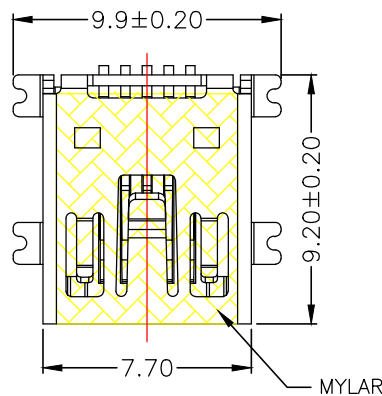


MATERIALS

HOUSING: HI-TEMP PLASTIC (UL 94V-0)
 SHELL: COPPER ALLOY, NICKEL PLATING
 TERMINAL: COPPER ALLOY, GOLD PLATED ON CONTACT AREA, TIN PLATED ON SOLDER TAIL

SPECIFICATION

CURRENT RATING: 1 AMP MAX
 DIELECTRIC WITHSTANDING: 100V AC FOR ONE MINUTE
 CONTACT RESISTANCE: 50m OHMS MAX
 INSULATION RESISTANCE: 100M OHMS MIN AT DC 100V
 OPERATION TEMPERATURE: -25°C~+85°C

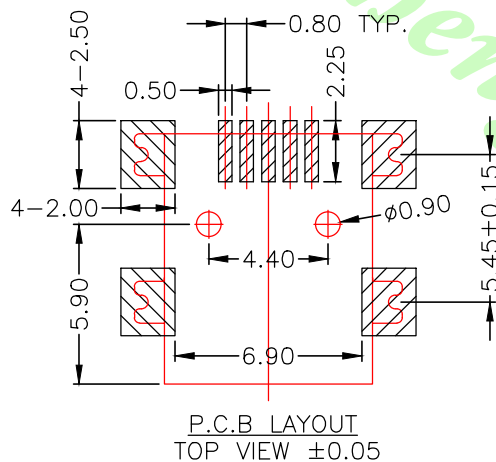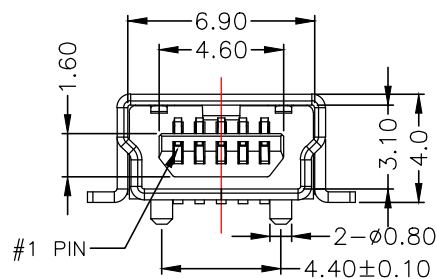

PART NUMBER

LMNUB-22MBH 0 5 1 T 1 2 0 L B * 2 1

SERIES

NO. OF POS.

CONTACT PLATED OPTION
 1: GOLD FLASH
 6: 30u" GOLD

TIN PLATING ON SOLDER TAIL

FEATURE
 0: WITHOUT MYLAR
 1: WITH MYLAR

SHELL PLATED
 1: MATTE TIN
 2: BRIGHT NICKEL

PACKING QUANTITY
 1: 800PCS/REEL 10 REEL/CARTON
 2: 1000PCS/REEL 10 REEL/CARTON

COLOR OPTION
 B: BLACK

TAPE REEL PACKAGE

公認/UNLESS OTHERWISE SPECIFIED TOLERANCES ARE			單位/Unit mm	品名/Title : MINI USB B TYPE, PCB MOUNT, SMT, METAL SHIELD , FEMALE, WITH MYLAR (T&R Package)	鍊亨電子有限公司 LAI HENG TECHNOLOGY LTD. TEL:(02) 8228-6487 FAX:(02) 8228-6486
A0	NEW DRAWING	2018.09.25	比例/Scale Free	料號/Part No : LMNUB-22MBH051T120LBx21	
REV	概述/REVISION	日期/DATE	ANG. ±3°	圖號/Drawing No : 22MB-001	核加/APPD. 7/0 審核/CHKD. Joe 製圖/DR. Mandy 張數/Sheet 1 of 1 REV. A0