

Specifications

Current Rating: 3A AC, DC
 Voltage Rating: 250 AC Maximum
 Operating Temp: -25°C ~ + 85°C
 Contact Resistance: 20MΩ Max
 Insulation Resistance: 1000MΩ Min
 Withstanding Voltage: 1000V AC/minute
 Terminal Material: Brass/ Gold-plated
 Material: Nylon 66, UL94V-2

| Poles | Dimension mm (in.) | | Part No. |
|-------|--------------------|--------------|----------------|
| | A | B | |
| 2 | 2.54(0.100) | 5.12(0.202) | LW-MX254S-02GO |
| 3 | 5.08(0.200) | 7.66(0.302) | LW-MX254S-03GO |
| 4 | 7.62(0.300) | 10.20(0.402) | LW-MX254S-04GO |
| 5 | 10.16(0.400) | 12.74(0.502) | LW-MX254S-05GO |
| 6 | 12.70(0.500) | 15.30(0.602) | LW-MX254S-06GO |
| 7 | 15.24(0.600) | 17.94(0.706) | LW-MX254S-07GO |
| 8 | 17.78(0.700) | 20.48(0.806) | LW-MX254S-08GO |
| 9 | 20.32(0.800) | 23.02(0.906) | LW-MX254S-09GO |
| 10 | 22.86(0.900) | 25.58(1.007) | LW-MX254S-10GO |
| 11 | 25.40(1.000) | 28.12(1.107) | LW-MX254S-11GO |
| 12 | 27.94(1.100) | 30.68(1.208) | LW-MX254S-12GO |
| 13 | 30.48(1.200) | 33.10(1.303) | LW-MX254S-13GO |
| 14 | 33.02(1.300) | 35.80(1.409) | LW-MX254S-14GO |
| 15 | 35.56(1.400) | 38.34(1.509) | LW-MX254S-15GO |
| 16 | 38.10(1.500) | 40.94(1.612) | LW-MX254S-16GO |
| 17 | 40.64(1.600) | 43.30(1.705) | LW-MX254S-17GO |
| 18 | 43.18(1.700) | 45.90(1.807) | LW-MX254S-18GO |
| 20 | 48.26(1.900) | 50.80(2.000) | LW-MX254S-20GO |

PART NO.:
LW-MX 254 S - XX GO






Contact Plating:
 GO: Gold Flash

No. Of Contact: 02~20

Angle Type: Straight Angle (180°)

Pitch: 2.54mm

Wafer Series No.

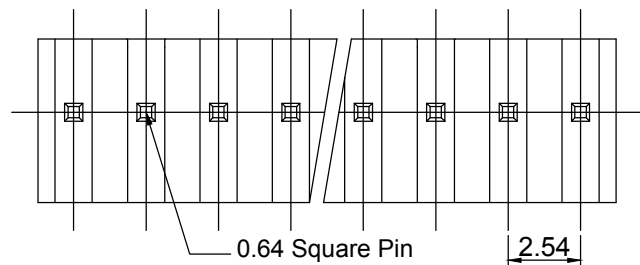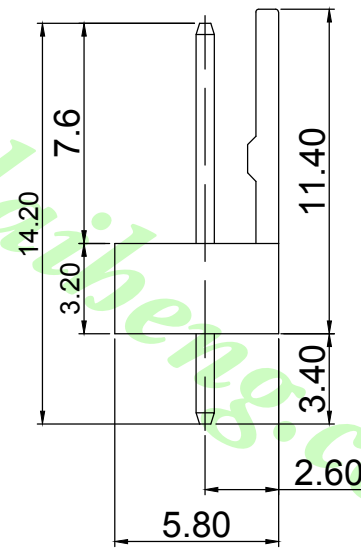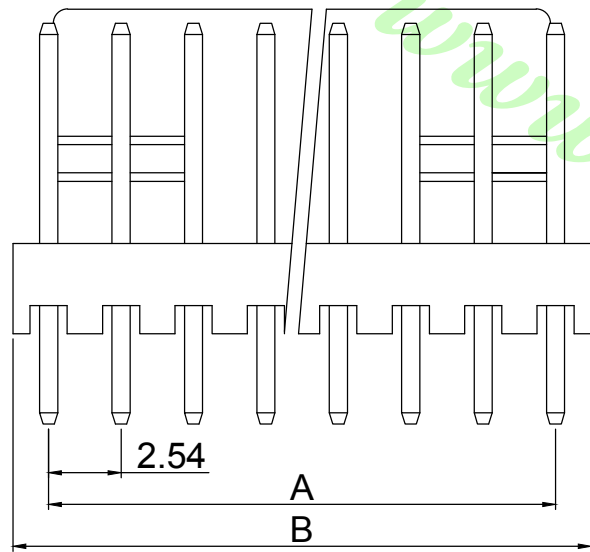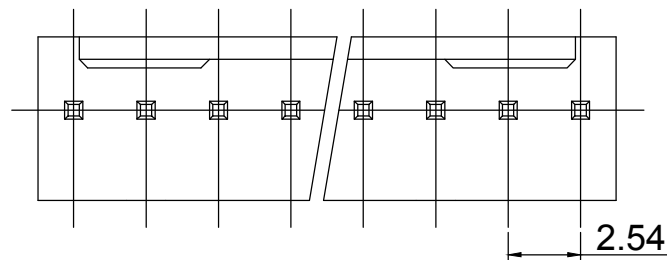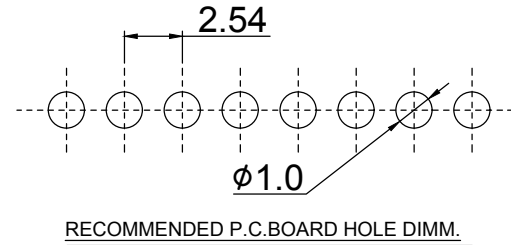

註
 2P-10P公差值為±0.25mm
 11P-20P公差值為±0.35mm

| | | | | | |
|----------------------------------------------|-------------|------------|---------------|---------------------------------------------------------|----------------------------------------------------------------------------------------|
| 公差/UNLESS OTHERWISE SPECIFIED TOLERANCES ARE | | | 單位/Unit mm | 品名(Title): | 鍊亨電子有限公司 LAI HENG TECHNOLOGY LTD. TEL: (02) 8228-6487 FAX: (02) 8228-6486 |
| X.XX ±0.25 X.X ±0.35 | | | 比例/Scale Free | 2.54mm Wire-to-Board Header DIP 180° Type (Gold Plated) | |
| A0 | NEW DRAWING | 2018.08.16 | Size A4 | 料號/Part No: LW-MX254S-XXGO | 圖號/Drawing No: 2511-XX-SG |
| REV | 概述/REVISION | 日期/DATE | | | |
| | | | | 核對/APPD. Joe | 審核/CHKD. Joe |
| | | | | 製圖/DR. Mandy | 報數/Sheet 1 of 1 |
| | | | | | REV. A0 |