

Features:

- Available in 2 thru 24 circuits
- Material: LCP UL 94-V0
- .0246"(0.625mm) square pins
- Tin-plated brass pin
- Mates with LH-MF300M-2xXX housing
- Standard color: Black



Specifications:

- Current rating:

Wire size	# 20	# 22	# 24	# 26	# 28	# 30
Ampere	5 A	5 A	4 A	3 A	2 A	1 A

- Voltage rating: 250V
- Contact resistance: 10mΩMax.
- Dielectric strength: 1500V AC/minute
- Temperature rise: 30°C max.

(carry rated current load)

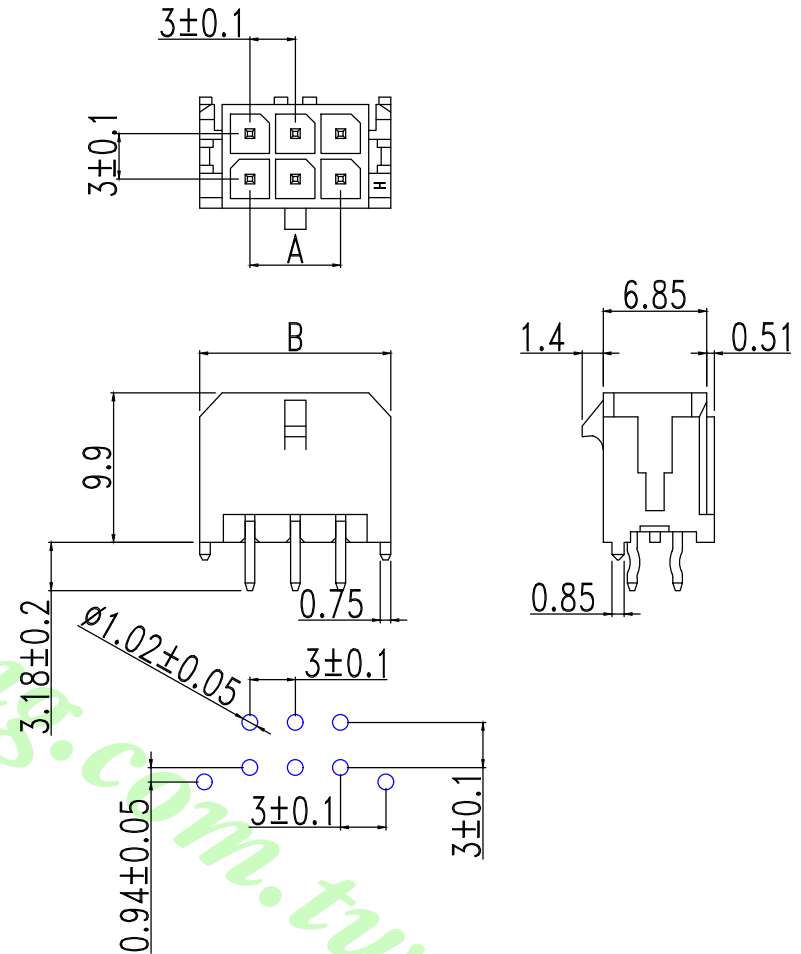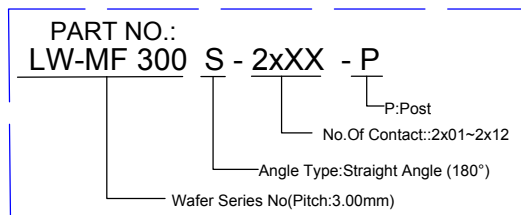

PCB Layout: Component side

Recommended PCB thickness: .062"(1.57mm)

Dimensional Information

Circuits	Dim. A	Dim. B	Circuits	Dim. A	Dim. B	Circuits	Dim. A	Dim. B	Circuits	Dim. A	Dim. B	Circuits	Dim. A	Dim. B	Circuits	Dim. A	Dim. B
2		6.7	6	6.0	12.65	10	12.0	18.65	14	18.0	24.65	18	24.0	30.65	22	30.0	36.65
4	3.0	9.65	8	9.0	15.65	12	15.0	21.65	16	21.0	27.65	20	27.0	33.65	24	33.0	39.65

			公差/UNLESS OTHERWISE SPECIFIED TOLERANCES ARE	單位/Unit mm	品名(Title): . 118"(3.0mm) Dual Row Vertical Header (180°)		銲亨電子有限公司 LAI HENG TECHNOLOGY LTD. TEL: (02) 8228-6487 FAX: (02) 8228-6486
A0	NEW DRAWING	2018.08.20	X.XXX ±0.05 X.XX ±0.15 X.X ±0.25	比例/Scale Free	料號/Part No: LW-MF300S-2xXX-P		
REV	概述/REVISION	日期/DATE		A4			核對/APPD. Joe 審核/CHKD. Joe 製圖/DR. Mandy 張數/Sheet 1 of 1 REV. A0