

Features:



- 2 ~ 24 circuits available
- Material: LCP
- Tin-plated brass pin
- Mates with LH-MF300M-2xXX housing

Specification:



- Current rating: 5A AC, DC
- Voltage rating: 250V AC, DC
- Contact resistance: 10mΩ Max.
- Dielectric withstanding voltage: 1500V AC/minute
- Ambient temperature range: -25°C ~ 85°C

P/N:LW-MF300S-2xXX-SHI

P/N:LW-MF300S-2xXX-SFI

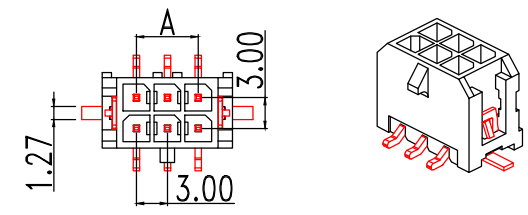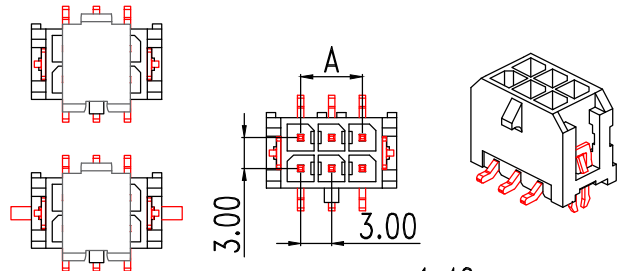


Shown with disposable cap

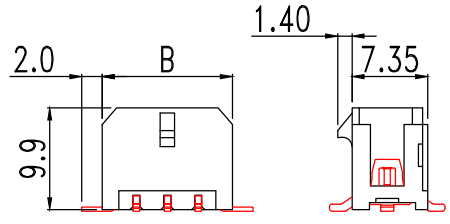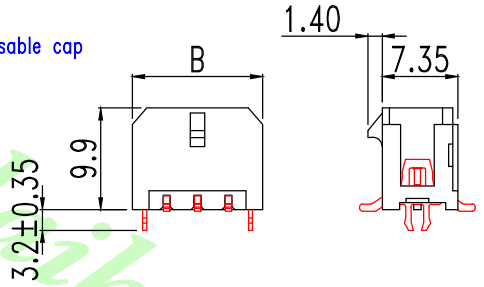


Ordering Information

Part No.	Feature
LW-MF300S-2xXX-SHI	With solderable retention clip
LW-MF300S-2xXX-SFI	With solderable fitting nail

&& 2xXX = 2x01 ~ 2x12

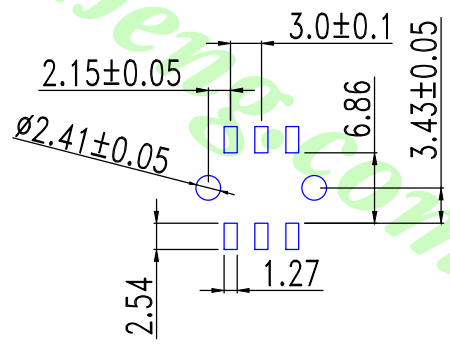

PCB Layout: Component side

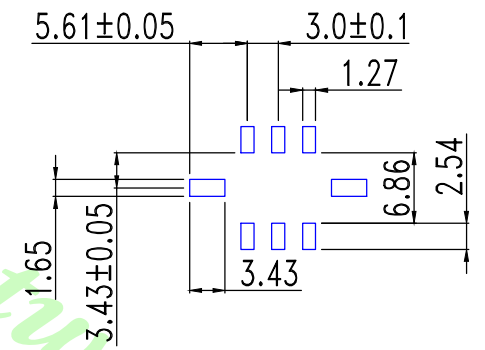

PCB Layout: Component side

Dimensional Information

Circuits	Dim. A	Dim. B	Circuits	Dim. A	Dim. B	Circuits	Dim. A	Dim. B	Circuits	Dim. A	Dim. B	Circuits	Dim. A	Dim. B	Circuits	Dim. A	Dim. B
2		6.65	6	6.0	12.65	10	12.0	18.65	14	18.0	24.65	18	24.0	30.65	22	30.0	36.65
4	3.0	9.65	8	9.0	15.65	12	15.0	21.65	16	21.0	27.65	20	27.0	33.65	24	33.0	39.65

公差/UNLESS OTHERWISE SPECIFIED TOLERANCES ARE			單位/Unit mm	品名(Title):
X.XXX ±0.05			比例/Scale	.118"(3.0mm) Dual Row Vertical(180°) Header ,SMT
X.XX ±0.15			Free	料號/Part No:
X.X ±0.25			A4	LW-MF300S-2xXX-S_I
A0	NEW DRAWING	2018.08.20	圖號/Drawing No:	
REV	概述/REVISION	日期/DATE	30001WS-SMT-N	

鍊亨電子有限公司
LAI HENG TECHNOLOGY LTD.
TEL: (02) 8228-6487 FAX: (02) 8228-6486

核對/APPD: Joe 審核/CHKD: Joe 製圖/DR: Mandy 報數/Sheet: 1 of 1