

Features:

- 2 ~ 24 circuits available
- Material: LCP
- Tin-plated brass pin
- Mates with LH-MF300M-2xXX housing

Specification:

- Current rating: 5A AC, DC
- Voltage rating: 250V AC, DC
- Contact resistance: 10mΩ Max.
- Dielectric withstanding voltage: 1500V AC/minute
- Ambient temperature range: -25°C ~ 85°C


Ordering Information

Part No.	Feature	Dim. X
LW-MF300R-2xXX-SH	With solderable retention clip	3.2
LW-MF300R-2xXX-SF	With solderable fitting nail	

&& 2xXX = 2x01 ~2x12

P/N:LW-MF300R-2xXX-SH

P/N:LW-MF300R-2xXX-SF

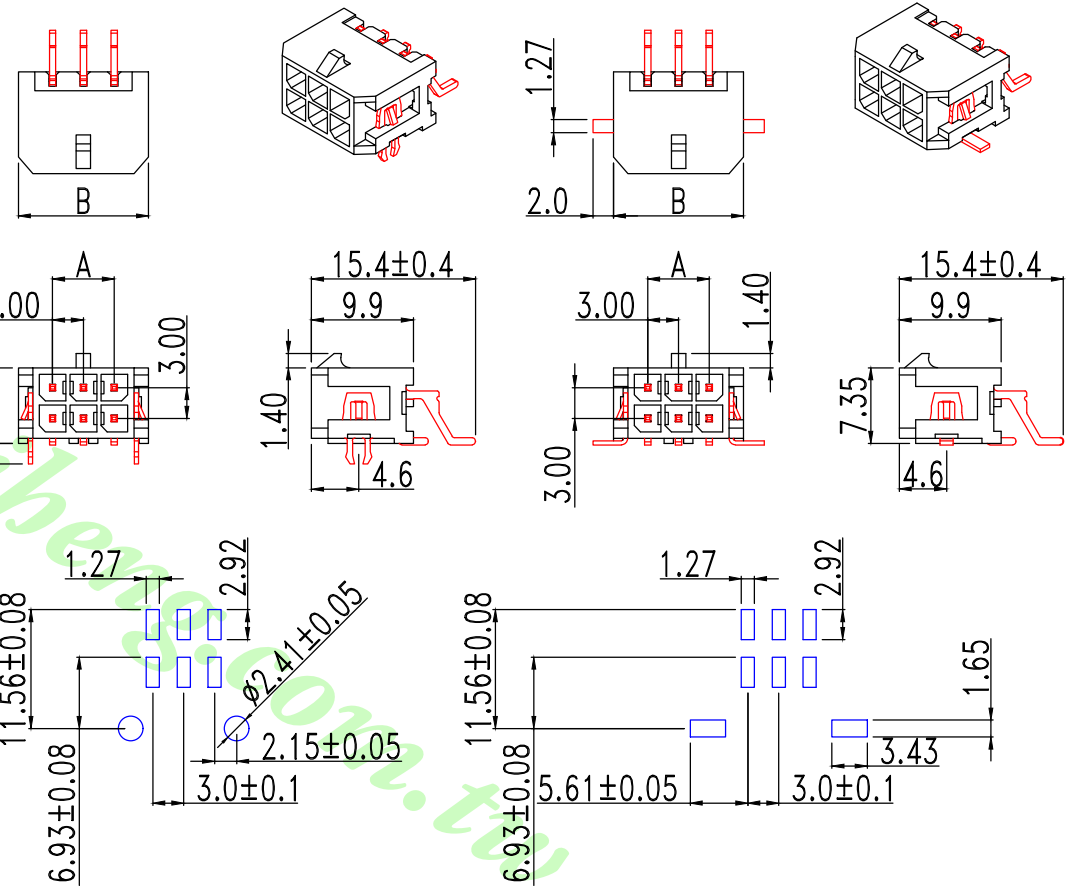


PCB Layout: Component side

PCB Layout: Component side

Dimensional Information

Circuits	Dim. A	Dim. B	Circuits	Dim. A	Dim. B	Circuits	Dim. A	Dim. B	Circuits	Dim. A	Dim. B	Circuits	Dim. A	Dim. B	Circuits	Dim. A	Dim. B
2		6.65	6	6.0	12.65	10	12.0	18.65	14	18.0	24.65	18	24.0	30.65	22	30.0	36.65
4	3.0	9.65	8	9.0	15.65	12	15.0	21.65	16	21.0	27.65	20	27.0	33.65	24	33.0	39.65

			公差/UNLESS OTHERWISE SPECIFIED TOLERANCES ARE		單位/Unit mm	品名(Title):		 鍊亨電子有限公司 LAI HENG TECHNOLOGY LTD. TEL: (02) 8228-6487 FAX: (02) 8228-6486								
			X.XXX ±0.05 X.XX ±0.15 X.X ±0.25		比例/Scale	.118" (3.0mm) Dual Row Right Angle (90°) Header , SMT										
A0	NEW DRAWING	2018.08.20			Free	料號/Part No:		圖號/Drawing No:								
REV	概述/REVISION	日期/DATE			Size A4	LW-MF300R-2xXX-S_		30001WR-SMT-N								
							核對/APPD. Joe		審核/CHKD. Joe		製圖/DR. Mandy		報數/Sheet 1 of 1		REV. A0	