


RoHS

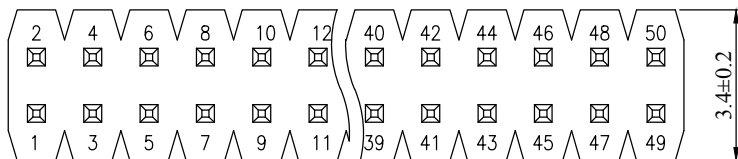

SPECIFICATION

Current Rating: 1 A
 Withstanding Voltage: 500V AC
 Insulation Resistance: 1000 Megohms Min.
 Operating Temperature: -55°C to +105°C

MATERIAL

Contact: Copper Alloy
 Insulator: NYLON 6T, UL94V-0
 Plating: All Gold or Tin

ORDER INFORMATION

LP/H 127 S X N a B b - 2xXX
 Pitch: 1.27mm Type S: 180°
 Material N: NYLON 6T
 No. Of Contact Dual Row: 2x02~2x50

a: Pin Chart Dimension See Pin Chart
 A: Insulation Height: 1.5mm, Width: 3.4mm
 b: Pin Chart Dimension See Pin Chart

Standard: 3B2.3

Contact Plating

T : Tin
 G : Gold Flash
 G3 : All Gold 3u"
 G5 : All Gold 5u"
 G10: All Gold 10u"
 G15: All Gold 15u"
 G20: All Gold 20u"
 G30: All Gold 30u"



Pin Chart:

a : _____ mm

Standard: 3.0mm

b : _____ mm

Standard: 2.3mm

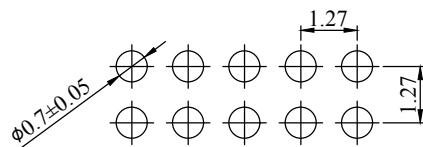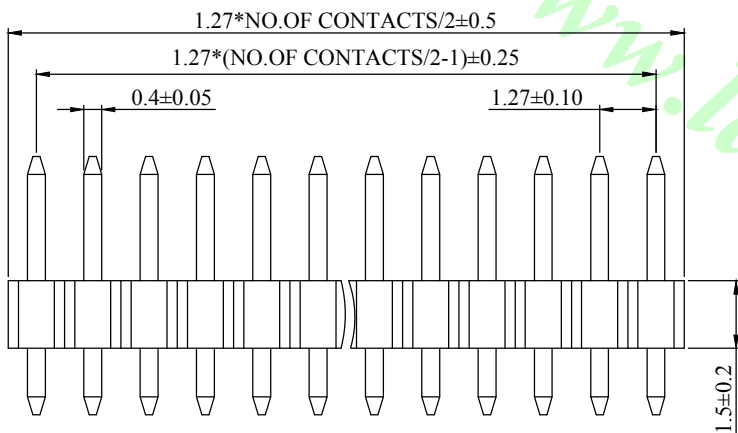

Recommended P.C.Board
 Hold Layout

公意/UNLESS OTHERWISE SPECIFIED TOLERANCES ARE		
A0	NEW DRAWING	2019.02.27
REV	概述/REVISION	日期/DATE

單位/Unit mm	品名/Title :
比例/Scale	1.27mm Pin Header H:1.5 W:3.4 Dual Row Straight Dip Type
Free	料號/Part No :
Size	LP/H127SXNaBb-2×XX
A4	圖號/Drawing No :
	127-GS-2×XX-AB-2

核加/APPD.	740	審核/CHKD.	Joe	製圖/DR.	Mandy	張數/Sheet	1 of 1	REV.	A0
----------	-----	----------	-----	--------	-------	----------	--------	------	----

銖亨電子有限公司 LAI HENG TECHNOLOGY LTD. TEL:(02) 8228-6487 FAX:(02) 8228-6486	
---	--