

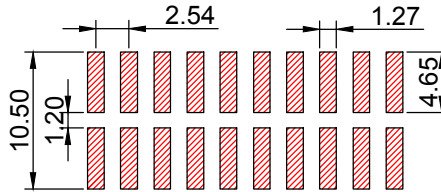
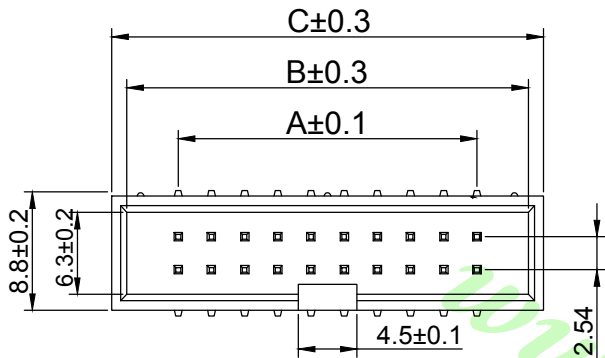
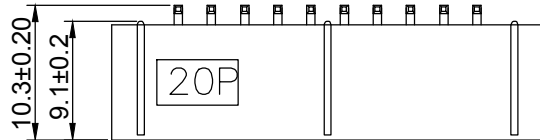


RoHS



Recommended P.C.B. layout

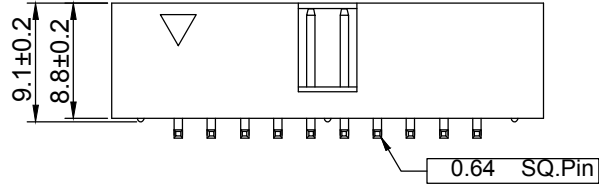

Part No.

LBH 254 T - XX

No. of Contacts (06~64)

T: SMT Type

2.54mm Pitch

Series No.

SPECIFICATIONS:

Current Rating: 3Amps.

Insulator Resistance: 1000 Megohms min.

Contact Resistance: 20m ohms max.

Dielectric Withstanding: AC 600V.

Operating Temperature: -40°C ~ +105°C.

Max. Processing Temp: 260°C for 5 seconds

Contact Material: Brass.

Insulator Material: Nylon-6T, UL94V-0, Color-Black

Finish: Gold Flash All Over.

NO. of Contacts	Dimensions		
	A	B	C
06	5.08	12.94	15.24
08	7.72	15.48	17.78
10	10.16	18.02	20.32
12	12.70	20.56	22.86
14	15.24	23.10	25.40
16	17.78	25.64	27.94
20	22.86	30.72	33.02
24	27.94	35.80	38.10
26	30.48	38.34	40.64
30	35.56	43.42	45.72
34	40.64	48.50	50.80
40	48.26	56.12	58.42
42	50.80	58.66	60.96
44	53.34	61.20	63.50
50	60.96	68.82	71.12
60	73.66	81.52	83.82
64	78.74	86.60	88.90

		公差/UNLESS OTHERWISE SPECIFIED TOLERANCES ARE		單位/Unit	品名(Title):	
				mm	2.54mm Box Header PCB Surface Mount Type Dual Rows	
		.X ±0.30		比例/Scale		
		.XX ±0.20		Free		
A0	NEW DRAWING	2019.07.26	.XXX ±0.10	Size	料號/Part No: LBH254T-XX	
REV	概述/REVISION	日期/DATE	ANG. ±2°	A4	圖號/Drawing No: YH87-XX-G-M-A-XX	



鍊亨電子有限公司
LAI HENG TECHNOLOGY LTD.
TEL: (02) 8228-6487 FAX: (02) 8228-6486

核對/APPD. Joe 審核/CHKD. Joe 製圖/DR. Mandy 報數/Sheet 1 of 1