
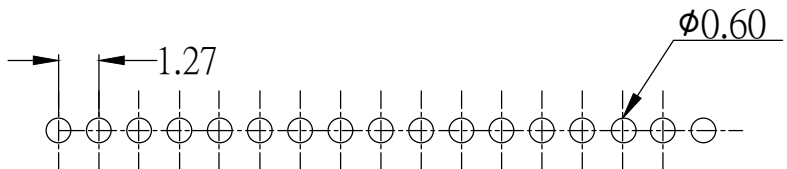
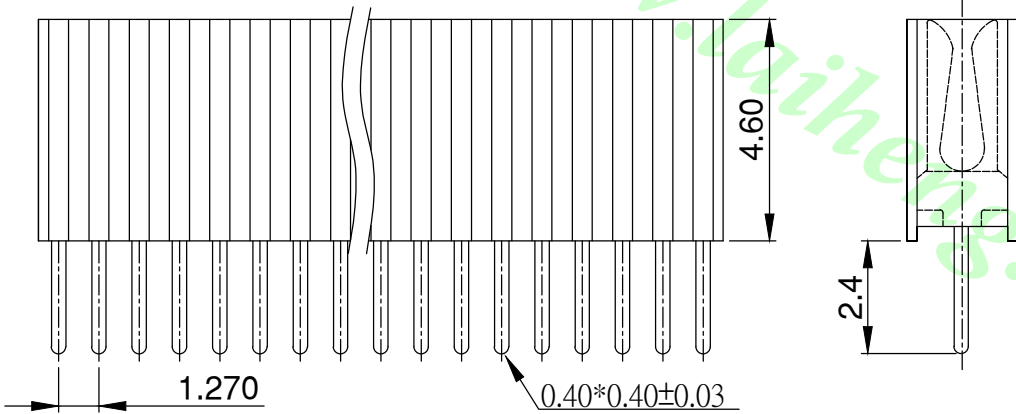


RoHS

Specifications

Current Rating : 1 Amp
 Insulator Resistance : 1000 Megohms Min.
 Contact Resistance : 20 m ohms max.
 Dielectric Withstanding : AC 500 V
 Operating Temperature : -40°C ~ +105°C
 Soldering Temperature : 260°C for 3~5sec Max.
 Contact Material : Phosphor Bronze
 Standard : Gold Flash all over
 Insulator Material : Polyester, UL 94V-0
 Standard : Nylon-6T (Black)

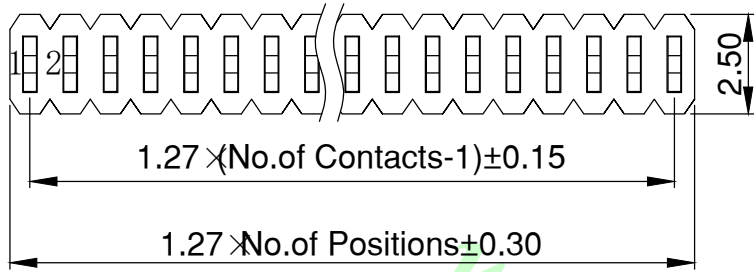


ORDER INFORMATION

LPCB 127 C S G N 2.4 - 1xXX

Pitch: 1.27mm
 Insulation
 Height: 4.6mm
 Width: 2.5mm
 TYPE S: 180°
 Contact Plating
 T : Tin
 G : Gold Flash
 G2 : Gold 2u"
 ...

DIP: 2.4mm
 No. Of Contact
 Single Row: 1x02~1x40
 Material
 N: NYLON 6T
 C: LCP

		公意/UNLESS OTHERWISE SPECIFIED TOLERANCES ARE		單位/Unit mm	品名(Title):	 鍊亨電子有限公司 LAI HENG TECHNOLOGY LTD. TEL: (02) 8228-6487 FAX: (02) 8228-6486	
		SPECIFIED TOLERANCES ARE		比例/Scale Free	1.27*1.27mm Female Header H:4.6 W:2.5 180° Single Row		
A0	NEW DRAWING	2019.09.02	X. ±0.5 .X ±0.3 .XX ±0.2 .XXX ±0.1	X° ±3° .X° ±2° .XX° ±1° .XXX° ±0.5°	料號/Part No:	圖號/Drawing No:	核對/APPD. 7/6
REV	概述/REVISION	日期/DATE			LPCB127CSG N 2.4-1xXX	MF127EV1XX-1XX-X	審核/CHKD. Joe
				Size A4			製圖/DR. Mandy
						報數/Sheet 1 of 1	
						REV. A0	