


SPECIFICATION

Current Rating: 3 A
 Withstanding Voltage: 500V AC
 Insulation Resistance: 1000 Megohms Min.
 Operating Temperature: -40°C to +85°C (PBT)
 -55°C to +105°C (NYLON 6T)

MATERIAL

Contact: Coppery Alloy
 Insulator: Polyester, UL94V-0
 NYLON 6T or PBT
 Plating: All Gold or Tin

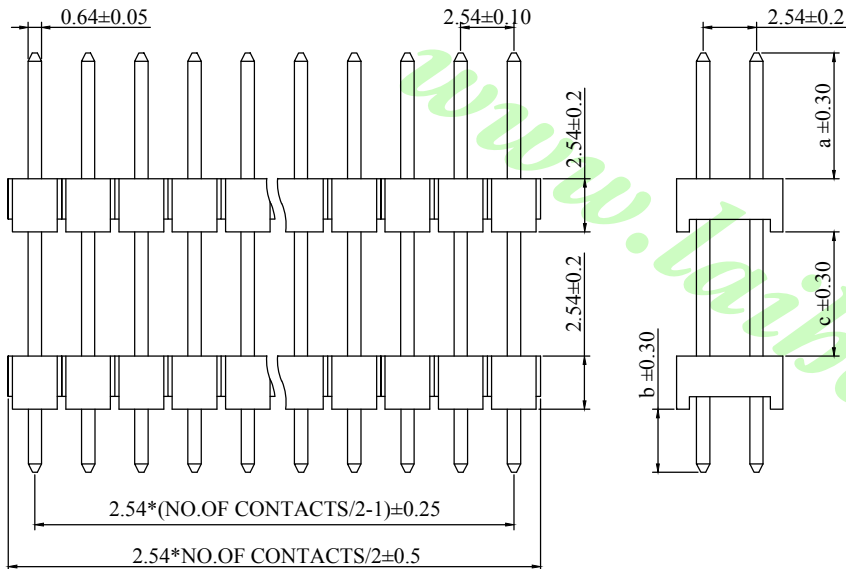

ORDER INFORMATION

LP/H 254 S X X a A c A b - 2xXX


Pitch: 2.54mm Type S: 180° Material P: PBT N: NYLON 6T No. Of Contact Dual Row: 2x02~2x40

a: Pin Chart Dimension See Pin Chart
 A: Insulation Height: 2.54mm, Width: 5.08mm
 c: Pin Chart Dimension See Pin Chart
 A: Insulation Height: 2.54mm, Width: 5.08mm
 b: Pin Chart Dimension See Pin Chart
 Standard: 6A0A3

Contact Plating
 T : Tin
 G : Gold Flash
 G3 : All Gold 3u"
 G5 : All Gold 5u"
 G10: All Gold 10u"
 G15: All Gold 15u"
 G20: All Gold 20u"
 G30: All Gold 30u"

Pin Chart:

a : _____ mm
 Standard: 6.0mm
 b : _____ mm
 Standard: 3.0mm
 c : _____ mm
 Standard: 0.0mm

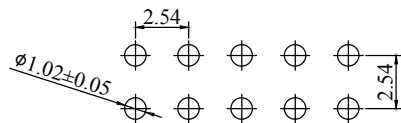

Recommended P.C.Board
 Hold Layout

公意/UNLESS OTHERWISE SPECIFIED TOLERANCES ARE			單位/Unit mm	品名/Title : 2.54mm Pin Header H:2.54 W:5.08 Dual Row Dual Base Straight Dip Type	鍊亨電子有限公司 LAI HENG TECHNOLOGY LTD. TEL:(02) 8228-6487 FAX:(02) 8228-6486	
A0	NEW DRAWING	2018.08.16	比例/Scale Free	料號/Part No : LP/H254SXXaAcAb-2×XX		圖號/Drawing No : 254-GSD-2×XX-ABC-X
REV	概述/REVISION	日期/DATE	Size A4			核加/APPD. 740 審核/CHKD. Joe 製圖/DR. Mandy 張數/Sheet 1 of 1 REV. A0