


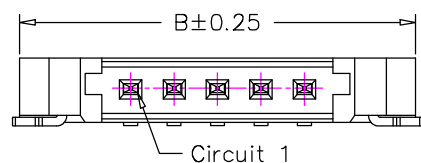



P.C.B. LAYOUT

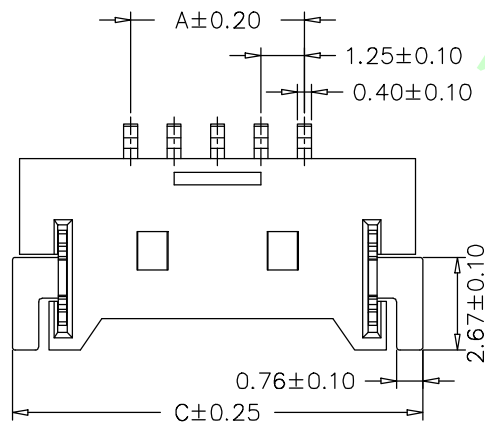


02~20P



30P



2P



3P

◆ SPECIFICATIONS

- Current rating: 1A AC, DC
- Voltage rating: 125V AC, DC
- Temperature range: -25°C ~ +85°C
- Insulation resistance: 100MΩ Min.
- Withstanding voltage: 500V AC/ minute.

Material:

Insulator: High temperature thermoplastics  
(Nylon-6T) / Color: Natural (Beige).

Contact: Phosphro Bronze.

Solder Nail: Brass.

Plating: Gold plated over Nickel.

Circuits: 2~20, 30 Pin.

Part No.	CKT.	Dimensions		
		A	B	C
LW-MX1251R-02-SR-LF30	02	1.25	7.65	8.07
LW-MX1251R-03-SR-LF30	03	2.50	8.90	9.32
LW-MX1251R-04-SR-LF30	04	3.75	10.15	10.57
LW-MX1251R-05-SR-LF30	05	5.00	11.40	11.82
LW-MX1251R-06-SR-LF30	06	6.25	12.65	13.07
LW-MX1251R-07-SR-LF30	07	7.50	13.90	14.32
LW-MX1251R-08-SR-LF30	08	8.75	15.15	15.57
LW-MX1251R-09-SR-LF30	09	10.00	16.40	16.82
LW-MX1251R-10-SR-LF30	10	11.25	17.65	18.07
LW-MX1251R-11-SR-LF30	11	12.50	18.90	19.32
LW-MX1251R-12-SR-LF30	12	13.75	20.15	20.57
LW-MX1251R-14-SR-LF30	14	16.25	22.65	23.07
LW-MX1251R-15-SR-LF30	15	17.50	23.90	24.32
LW-MX1251R-16-SR-LF30	16	18.75	25.15	25.57
LW-MX1251R-20-SR-LF30	20	23.75	30.15	30.57
LW-MX1251R-30-SR-LF30	30	36.25	42.65	43.07

REV	NEW DRAWING	2019.06.20
REV	概述/REVISION	日期/DATE

公差/Unit	單位/Unit
X. ±0.5	mm
X.X ±0.30	mm
X.XX ±0.20	mm
X.XXX ±0.10	mm

品名(Title):	WIRE TO BOARD 1.25mm WAFER
	SMT 90° Type Tape & Reel
料號/Part No.:	LW-MX1251R-XX-SR-LF30
圖號/Drawing No.:	MMX1254RS1G-XX-X


**鍊亨電子有限公司**  
 LAI HENG TECHNOLOGY LTD.  
 TEL: (02) 8228-6487 FAX: (02) 8228-6486  
 核對/APPD. Joe 審核/CHKD. Joe 製圖/DR. Mandy 張數/Sheet 1 of 1